SM0CBN

Z zinc pl.

AERATED CONCRETE NAIL

Aerated concrete nail with collar.

TYPE CBN



TYPE MCB





ADVANTAGES

- Easy and quick installation.
- No predrilling necessary in cellular concrete with low compression strength.
- Optimal anchoring in cellular concrete.

FUNCTIONING

- Push-through installation.
- Direct installation into cellular concrete, without predrilling.

CELLENBETONNAGEL

Speciale verankering voor gasbeton, met verzonken kop of metrische draad met moer.

VOORDELEN

- Snelle en eenvoudige installatie.
- Voorboren niet nodig in cellenbeton met lage druksterkte.
- Optimale verankering in cellenbeton.

TOEPASSING

- Doorsteekmontage.
- Eerst de huls inslaan, daarna de nagel.

CLOU POUR BÉTON CELLULAIRE

Clou spécial pour béton cellulaire, avec tête fraisée ou filet métrique avec clou.


AVANTAGES

- Installation simple et rapide.
- Dans le béton cellulaire basse densité, il n'est pas nécessaire de préforer.
- Ancrage optimal dans le béton cellulaire.

APPLICATION


- Installation traversante.
- D'abord le tube, puis le clou.

INSTALLATION SCHEME



INFO

d [mm]	l [mm]	d_0 [mm]	$h_1 \geq$ [mm]	h_{ef} [mm]	$t_{fix} \leq$ [mm]
6	60	5	55	50	10
6	90	5	55	50	40
8	90	6	85	80	10
8	115	6	85	80	35
8	130	6	85	80	50

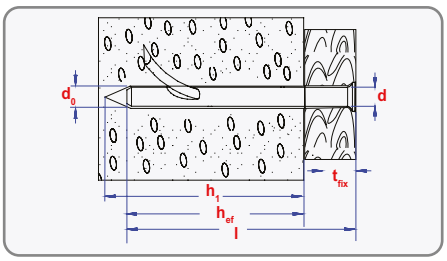




Carton box packing - Kartonverpakking - Boîte carton

size	pgb code	EAN13	
6x60	SM0CBN0010600603	5902134714417	50
6x90	SM0CBN0010600903	5902134714424	50
8x90	SM0CBN0010800903	5902134714448	50
8x115	SM0CBN0010801153	5902134714455	50
8x130	SM0CBN0010801303	5902134714462	50




Carton box packing - Kartonverpakking - Boîte carton

size	pgb code	EAN13	
M 6x60	SM0MCB0010600603	5902134714356	50
M 6x90	SM0MCB0010600903	5902134714363	50
M 8x90	SM0MCB0010800903	5902134714387	50
M 8x115	SM0MCB0010801153	5902134714394	50
M 8x130	SM0MCB0010801303	5902134714400	50

LOADS - BELASTINGEN - CHARGES

Recommended loads for a single anchor. [1)]
Maximaal aanbevolen belasting voor één anker. [1)]
Charges maximales recommandées pour un ancrage simple. [1)]

Type CBN - MCB			ø 6	ø 8
Aerated concrete / Cellenbeton / Béton cellulaire	≥ PP4, PB4(G4)	[kN]	0,11	0,24

[1)] including / inclusief / Inclus safety factor 5.